



DTS GmbH
Germany


06

New

Grooving Systems PCD, CVD-D, UltraDiamond, CBN



Tool and
Mold Forming

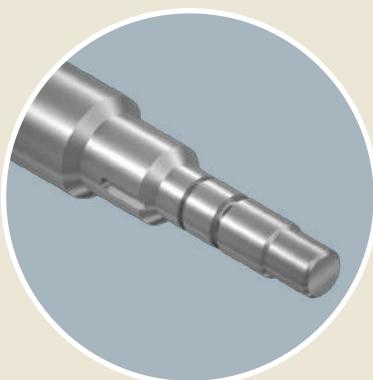



Automotive
Mechanical Engineering



Medical Technology
Microtechnology



Aerospace

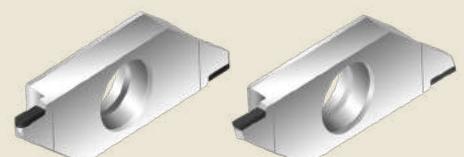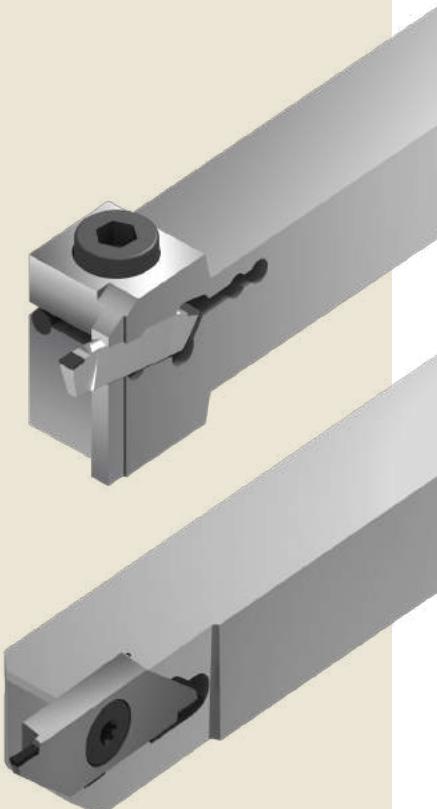

About us

Diamond Tooling Systems



Welcome to DTS - Diamond Tooling Systems GmbH!

Based in Kaiserslautern - Germany - we have specialized in the development, production and distribution of precision tools equipped with ultrahard cutting materials, such as CVD-D (CVD thick film diamond), PCD (polycrystalline diamond), UltraDiamond (monocrystalline binderless diamond) and CBN (cubic boron nitride). As a leading manufacturer for tools with lasered cutting edges, we offer machining solutions in the areas of turning, milling, grooving, drilling, reaming, threading, and tool holding.

To be able to economically process ultra-hard cutting materials such as PCD, CVD-D and CBN on precision tools we realized early on that we would have to move away from the traditional production technology of „grinding“ to new technologies such as the „laser removal process“. This decision has contributed to the fact that our customers regard us, DTS GmbH, as the pioneer and leading manufacturer of lasered tools for machining.

Ultra-hard high-performance cutting materials have a key function in metal-cutting manufacturing. Precision tools equipped with ultra-hard cutting materials are products that require a great deal of explanation. The economical use of the cutting materials is only ensured if the machining process and the cutting material are coordinated with each other.

This is exactly where we at DTS - Diamond Tooling Systems GmbH - step in: Tools and processes are subjected to a comprehensive analysis by our experienced application engineers. Subsequently, the new process optimization is presented to the customer and in the next step, it is implemented in their production. Only in that way is it possible to exploit the optimum potential of our high-tech cutting materials.

Our experienced application engineers are also available to advise you during ongoing production. This close cooperation and mutual trust is the basis of our success.

With more than 25 years of optimization experience in the processing industry, this is where we see our strength!

Contents

Grooving systems



DTS GmbH

Germany

Overview

Ultrahard Cutting Materials at a Glance	04
Our Cutting Materials at a Glance	06
Our Cutting Material Assignment	08
Internal Grooving and Special Grooving Systems	10
Chip Breaker	10

Grooving Systems

Grooving System ECO-Line at a Glance	14
Grooving System MICRO-Line at a Glance	15
Corner and Full Radius Grooving Inserts	16
Grooving Toolholder and Grooving Inserts - System ECO-Line	18
Grooving Toolholder and Grooving Inserts - System MICRO-Line	20

Technical Attachment

Cutting Parameters ECO-Line	22
Cutting Parameters MICRO-Line	24
Cooling	26
Formulas	27
Copyright and Safety Instructions	31




You can also get all of our products via our online shop - anytime, fast and easy.
www.diamond-tools24.com

PASSION FOR DIAMOND...

ultrahard cutting materials at a glance



... is not just a slogan for us - we live this passion in our daily dealings with our customers and we are your partner when it comes to diamond or CBN tools.

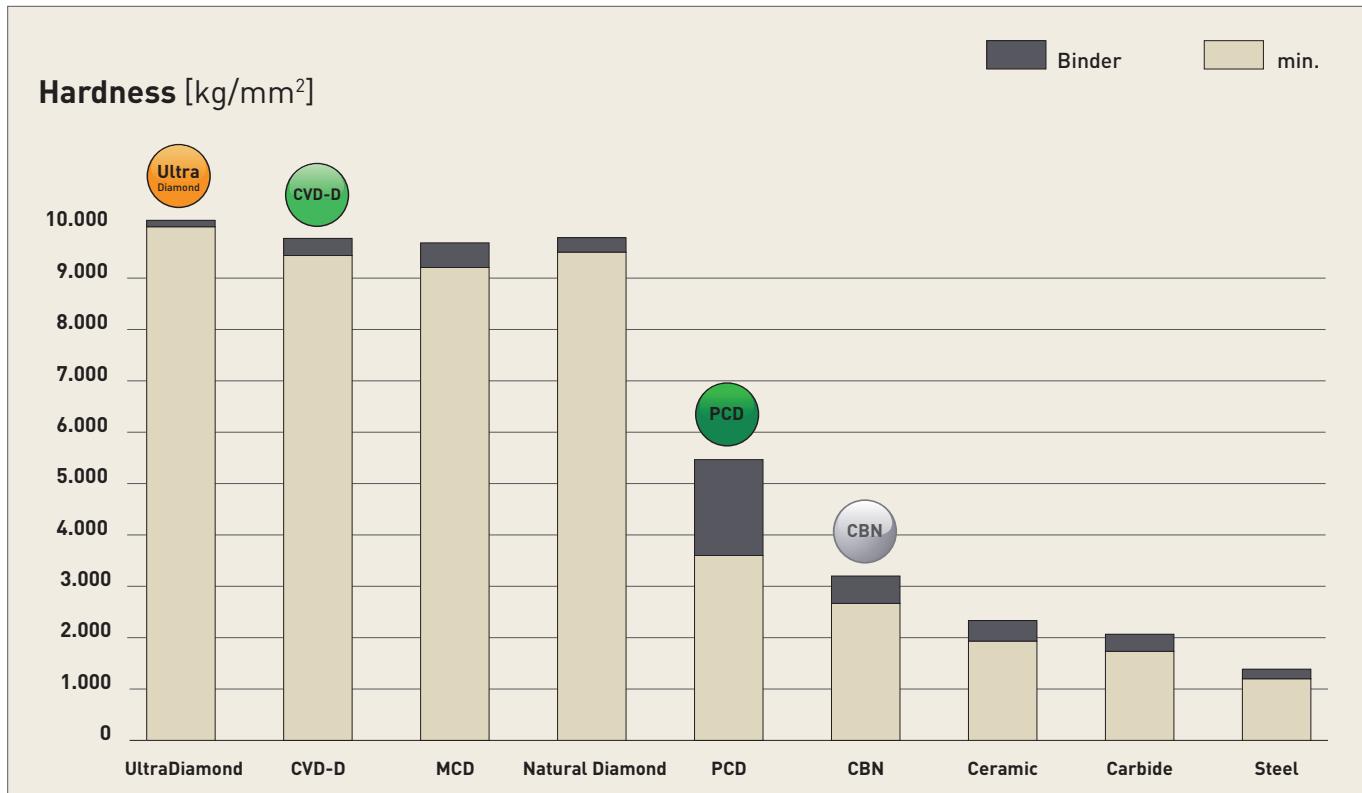

Polycrystalline diamond (PCD)

The well-known Standard Diamond

PCD is a synthetically produced, extremely tough, intergrown mass of diamond particles with a random orientation in a metal matrix. It is produced by sintering selected diamond particles under high pressure and high temperatures.

Graphite serves as a catalyst allowing the PDC crystals to intergrow. PCD has a high thermal conductivity and good heat dissipation away from the cutting edge. In addition, PCD has the highest bending fracture strength of all cutting materials.

PCD is very well suited for machining aluminum with a Si content of up to 12% and/or other abrasive fillers. The thermal hardness is about 750°C. The areas of application are like those of CVD thick-film diamond, but CVD thick film has a higher cost effectiveness with hard-brittle materials or aluminum from a Si content of 12%.

CVD-Thickfilm Diamond (CVD-D)

The Star among Diamond Cutting Materials

For the machining of hard-brittle materials such as Ceramics, glass, glass-Ceramics, tungsten Carbide, MMC and fiber-reinforced composites such as CFRP and GFRP. Due to the lack of a bonding matrix, the diamond content is much higher than with PCD. In the group of ultra-hard cutting materials, binderless CVD-D is one of the hardest man-made diamond cutting materials.

CVD-D is characterized by high hardness as well as high wear resistance. These properties make CVD-D the perfect cutting material for machining abrasive materials. Compared to PCD, which is damaged by the abrasive particles due to its soft metallic binder phase, the CVD-D cutting edge remains stable due to its binderless anchoring in the diamond matrix.

With the correct use of CVD-D, the tool life can be increased by up to 10 times (and even more) compared to PCD!

Binderless Diamond (UltraDiamond)

The hardest Mono Crystal

Single-crystal elements are laser-cut from diamond blanks in a defined orientation using laser segmentation technology. This new technology makes it possible, in addition to polycrystalline cutting materials such as PCD and CVD-D, to also braze a monocrystal (UltraDiamond) under high vacuum on any tool carrier. Compared to PCD, the tool life can be increased by approx. 15 to 25 times and compared to CVD-D by approx. 2 to 5 times.

The areas of application are similar to PCD and CVD-D, but this monocrystalline cutting material offers a further significant increase in tool life in all applications where PCD and CVD-D reach the limits of economic viability. The UltraDiamond cutting material makes economical machining of very hard, highly brittle materials such as Ceramics, glass, glass-Ceramics and hard metals with low cobalt binder and nickel binder (<10%) possible.

Polycrystalline Cubic Boron Nitride (CBN)

Chemically resistant and stable at high temperatures

of up to 1,400°C. Boron nitride powder is the starting point for the production of CBN, which has been available since the end of the 1960s. It is produced under high pressure and at temperatures of over 1,500°C and the many different substrates are specifically adapted to the final application.

CBN is now considered the second hardest material after diamond cutting materials!

The applications of CBN take place in the automotive industry, aerospace, tool and die and mold making as well as in mechanical engineering. The wide range as cutting and abrasive material includes hardened steels, cast irons, chilled Cast Iron, sintered materials, stellites, nickel- and cobalt-based superalloys. In many applications, cubic boron nitride is preferred to diamond cutting materials because it is absolutely stable in air at temperatures up to 1,400°C. Diamond, on the other hand, begins to decompose at a temperature of approx. 750°C.

Compared to PCD, CBN is also characterized by its chemical resistance to ferrous materials.

Our Cutting Materials

and their main applications at a glance

We want to offer you the ideal solution for your application. Therefore, we have developed four main cutting material, specially adapted to the requirements of the different materials.

Below you will find an overview of the different groups.

PCD

PCD

is ideally suited for the machining of *

**Aluminum <10% Si | Brass | Copper, Copper Alloys | Graphite |
Magnesium | PEEK | Tungsten alloy**



ECO-Line

MICRO-Line

CVD-D

CVD-D

is ideally suited for the machining of *

**Acrylic (PMMA) | Aluminum >10% Si | Carbide | Ceramics |
Composites (GFRP/CFRP) | Copper, Copper Alloys | Glass, Glass Ceramic |
Magnesium | Plastic | Silver, Gold, Platinum | Titanium | Zirconium**



ECO-Line

MICRO-Line

UltraDiamond

Ultra
Diamond

is ideally suited for the machining of *

Acrylic (PMMA) | Carbide | Ceramic | Glass, Glass Ceramic



MICRO-Line

CBN-H

H

is ideally suited for the machining of *

**Steel, hardened up to 72 HRC
Sinter Steel, hardened**



ECO-Line

MICRO-Line

CBN-X

X

is ideally suited for the machining of *

**Powder metallurgical Steel, hardened
Special Alloys such as ASP, CPM, Hardox
Tool Steel, hardened up to 72 HRC**



ECO-Line

MICRO-Line

CBN-K

K

is ideally suited for the machining of *

**Grey Cast Iron (GCI)
Ductile Cast Iron (DCI)**



ECO-Line

MICRO-Line

* all other applications can be found in the complete cutting material assignment from page 8.

Your Notes



DTS GmbH
Germany

Our Cutting Material Assignment

about the materials

Benefit from over 25 years of application experience with ultra-hard cutting materials.

In the table you will find our cutting material recommendation for each material.

ISO	Material	PCD	CVD-D	Ultra Diamond	CBN-H	CBN-X	CBN-K
		Green ✓	Orange ✓	First choice	Possible alternative		
H	Powder metallurgical Steel, hardened			✓	✓		
	Special Alloys (ASP,CPM,Hardox)			✓	✓		
	Steel, hardened up to 72 HRC			✓	✓		
	Tool Steel, hardened up to 72 HRC			✓	✓		
P	Sintered Steel				✓	✓	✓
	Sintered Steel, hardened			✓	✓		
K	Grey Cast Iron (GCI)					✓	
	Ductile Cast Iron (DCI)					✓	✓
	Shell Chilled Cast Iron			✓	✓		
S	Ni-, Co-, Fe- and Cr-Alloys			✓	✓		
	Titanium Alloys			✓	✓		
M	Stainless Steel, hardened			✓	✓		
N	Acrylic (PMMA)		✓	✓			
	Aluminum, < 10% Si	✓	✓				
	Aluminum, > 10% Si		✓	✓			
	Glass, Glass Ceramic	✓	✓				
	Graphite		✓	✓			
	Carbide G-Grade, < 15% Co		✓				
	Carbide G-Grade, > 15% Co		✓	✓			
	Carbide K-Grade, < 15% Co		✓				
	Carbide K-Grade, > 15% Co	✓					



You cannot find your material in the table?

If you have any further technical questions, please do not hesitate to contact us by phone or e-mail!

Phone: +49(0)6301 32011-0

Mail: info@diamond-toolingsystems.com

ISO	Material	PCD	CVD-D	Ultra Diamond	CBN-H	CBN-X	CBN-K
N	Carbide (Green)			✓			
	Carbide with Ni Binder		✓	✓			
	Ceramics	✓					
	Ceramics (Green)	✓	✓				
	Plastics	✓	✓				
	Copper, Copper Alloys		✓	✓			
	Magnesium	✓	✓				
	Brass	✓	✓				
	MMC		✓	✓			
	PEEK		✓				
	Silver, Gold, Platinum	✓	✓				
	Composite such as CFG/GFRP		✓	✓			
	Tungsten alloy	✓	✓				
	Zirconium		✓	✓			



Special tools on request for you!
Please send inquiries to info@diamond-toolingsystems.com



All our products are also available in the online shop.
Visit us at diamond-tools24.com

Internal Grooving and Special Grooving Systems

your individual request for special tools

On request, we can manufacture internal grooving systems / special grooving systems equipped with our cutting materials.



ECO-Line Indexable Insert 2-edge tipped

- ✓ PCD Grooving Insert
- ✓ CVD-D Grooving Insert
- ✓ UltraDiamond Grooving Insert
- ✓ CBN Grooving Insert



You will find the material assignment from page 8.


MICRO-Line Indexable Insert 2-edge tipped

Long Chips from Grooving and Hard Grooving?

We can also laser cut 3D chip breaker onto our grooving tools, to create controlled chip breakage.

With DTS chip breakers you are able to control the chip breakage of the following materials:

- ✓ Aluminum
- ✓ Brass lead-free
- ✓ Copper
- ✓ Plastics
- ✓ Steel hardened
- ✓ Tool Steel

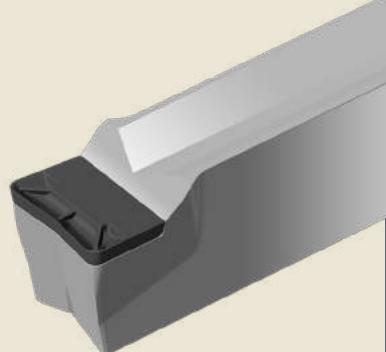

Further advantages of chip breakers:

- Cutting pressure is reduced by approximately 40%
- No scratching of the finished surfaces from chips


Special and profile grooving tools are available upon request.

Your Notes



DTS GmbH
Germany

Your Notes

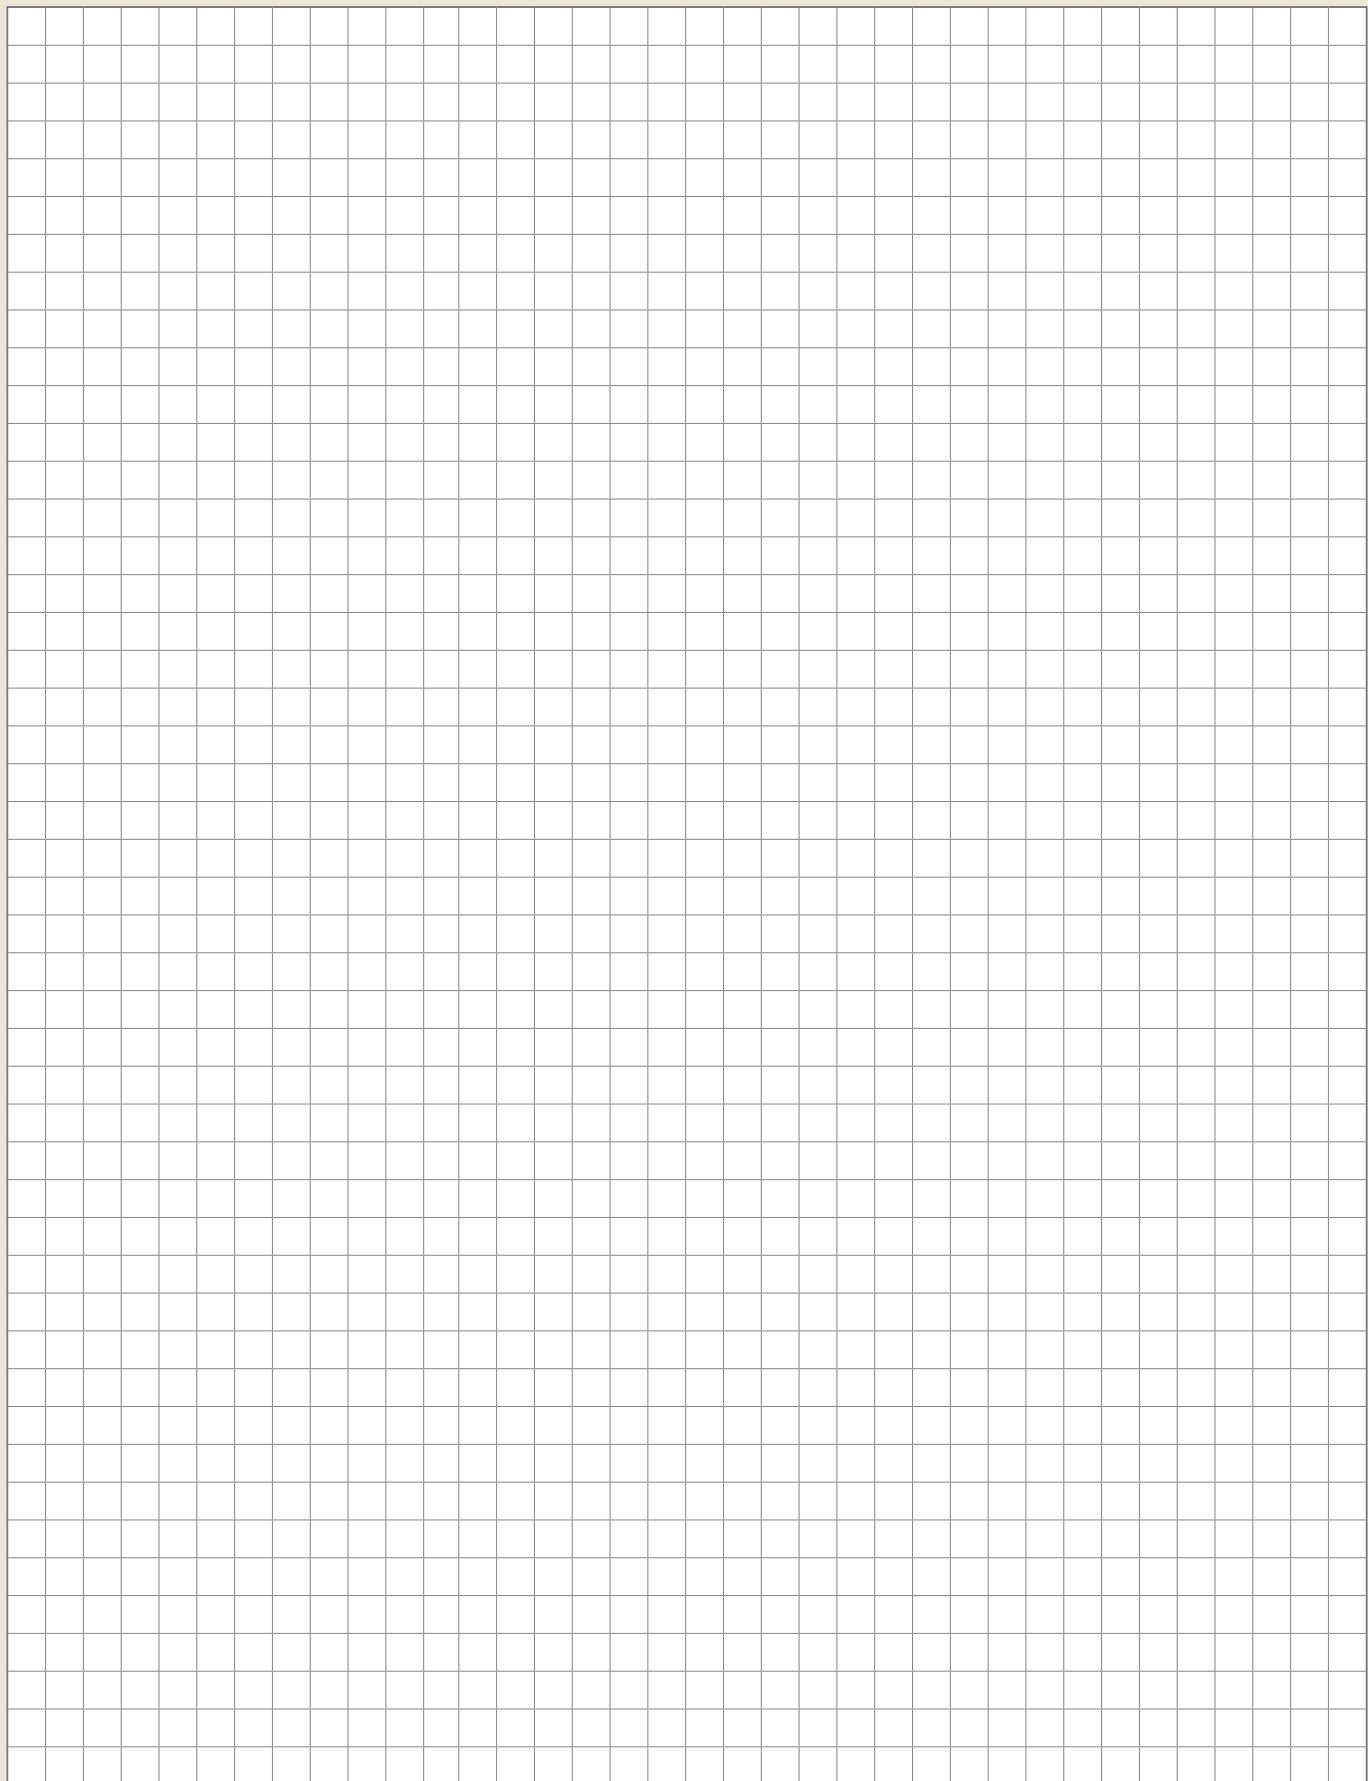


Your Notes



DTS GmbH
Germany

Grooving System ECO-Line

Overview and Applications


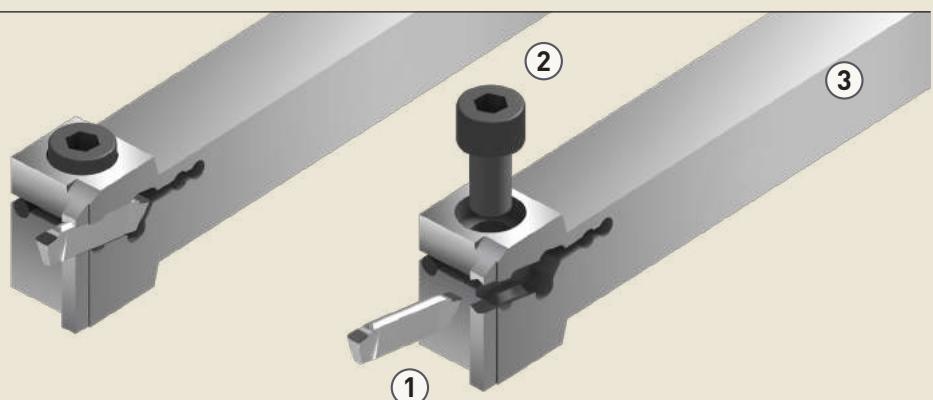


ECO-Line Tool Holder System

- ① Precision machined base body
- ② Screw for clamping the insert
- ③ Low vibration tool holder

ECO-Line - Indexable Grooving Insert

- Laser cut diamond or CBN cutting edge
- High vacuum brazed
- Precision machined carbide base body
- Two cutting edges (Z2)
- In cutting materials: PCD / CVD-D / CBN

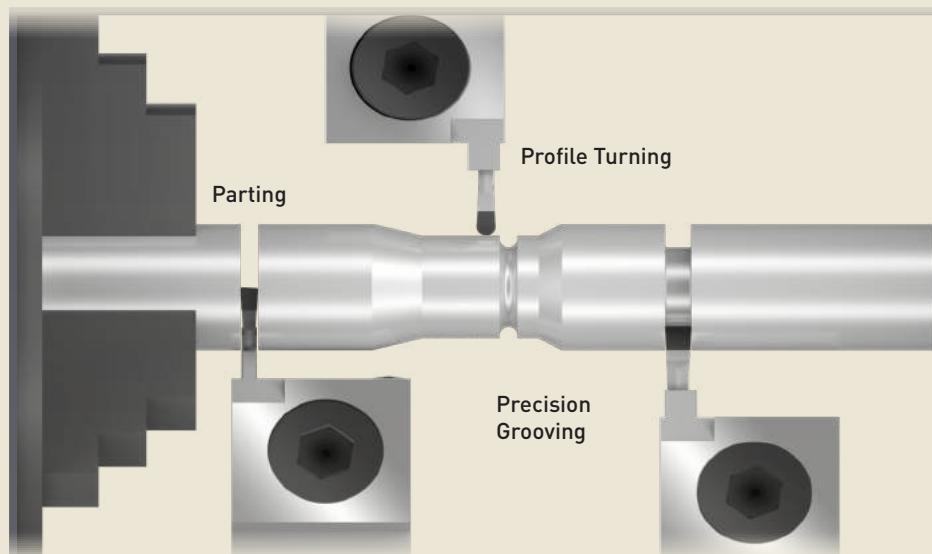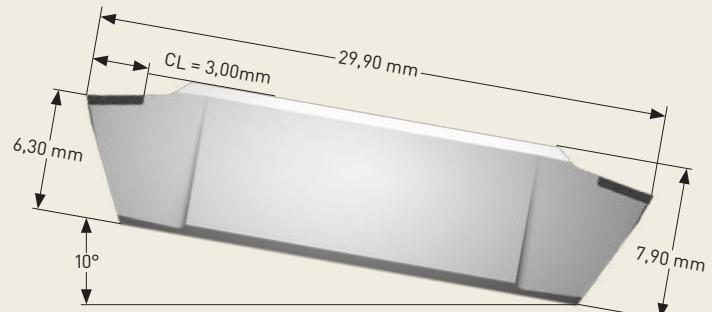


Grooving System MICRO-Line

Overview and Applications



DTS GmbH

Germany

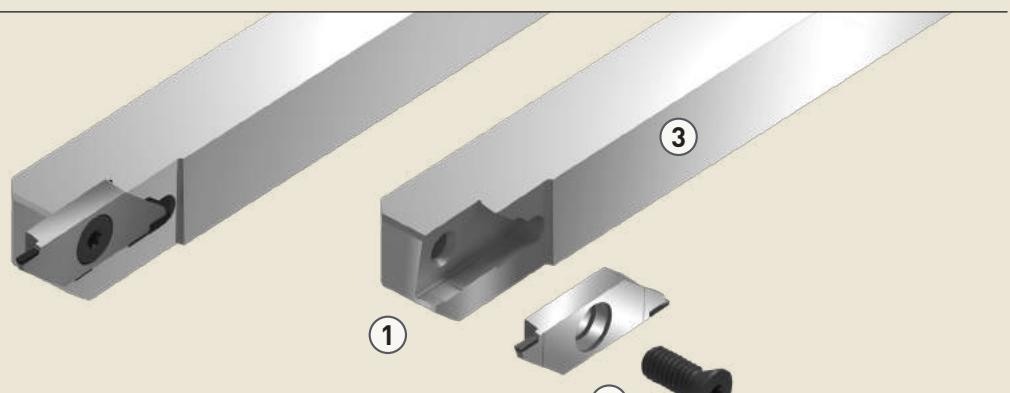


MICRO-Line Tool Holder System

- ① Precision machined base body
- ② Screw for directly clamping the insert
- ③ Precision machined, low vibration tool holder

MICRO-Line - Indexable Grooving Insert

- Laser cut diamond or CBN cutting edge
- High vacuum brazed
- Precision machined carbide base body
- Precision machined center bore
- Tangential clamping provides the best stability
- Two cutting edges (Z2)
- In cutting materials: PCD / CVD-D / UltraDiamond / CBN

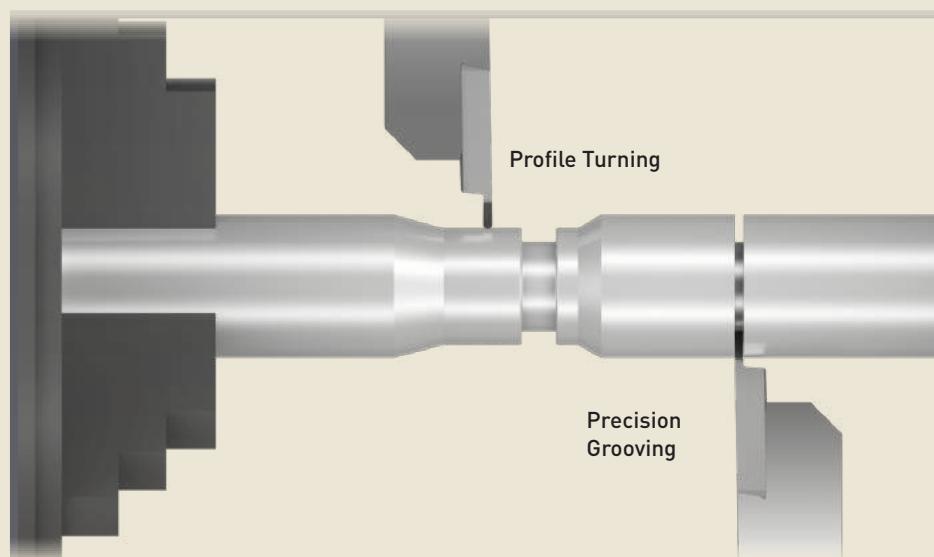


Corner and Full Radius Grooving Inserts

for Grooving, Profile Turning and Parting

ECO-Line System | Toolholder

Benefits:

- Designed for grooving with diamond and CBN cutting materials
- Right and left holders in different dimensions from stock
- Two grooving depths available in stock: 12,00mm and 25,00mm
- For continuous and interrupted cuts

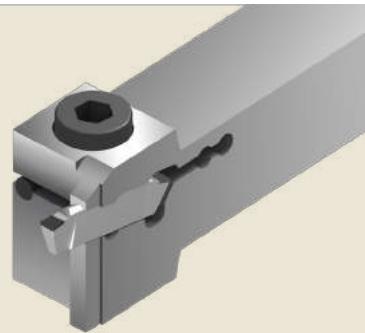

ECO-Line EST and RST System | Corner and Full Radius Grooving Inserts

Benefits:

- Corner grooving insert, width 2,00 mm to 4,00 mm, tolerance +/- 0,01 mm in stock
- Radii from 0,10 mm to 0,20 mm, tolerance +/- 0,01 mm in stock
- Tipped with 2 cutting edges (on request also with chip breakers)
- Full radius grooving insert, width 2,00 mm to 6,00 mm, tolerance +/- 0,01 mm in stock
- Full radius from 1,00 mm to 3,00 mm, tolerance +/- 0,01 mm in stock
- Tipped with 2 cutting edges (on request also with chip breakers)
- Cutting edge length 3,00 mm



ECO-EST



ECO-RST

ECO-Line AST | Parting Inserts

Benefits:

- Parting insert left, width 2,00mm, tolerance +/- 0,01 mm in stock
- Tipped with 2 cutting edges (on request auch mit Spanleitstufen)
- Parting insert right, width 2,00mm, tolerance +/- 0,01 mm in stock
- Tipped with 2 cutting edges (on request also with chip breaker)



ECO-AST-left



ECO-AST-right

You can get the following materials for our grooving systems:






MICRO-Line System | Tool Holder

Benefits:

- Designed for grooving with diamond and CBN cutting materials
- Right side and left side tool holders in different dimensions in stock
- Grooving depth up to 3,80 mm
- For continuous and interrupted cuts
- Stable and precise guiding of the grooving insert
- Easy and quick change of the grooving insert

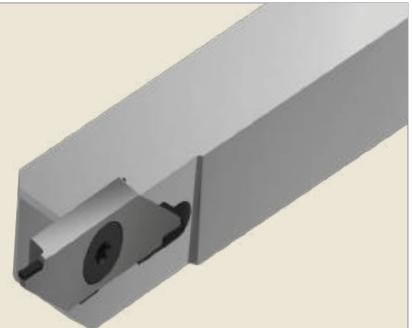

MICRO-Line EST and RST System | Corner and Full Radius Grooving Inserts

Benefits:

- Corner grooving insert, width 1,00 mm to 2,00 mm, tolerance +/- 0,01 mm in stock
- Radii from 0,05 mm to 0,20 mm, tolerance +/- 0,01 mm in stock
- Tipped with 2 cutting edges (on request also with chip breakers)
- Full radius grooving insert, width 2,00 mm to 6,00 mm, tolerance +/- 0,01 mm in stock
- Full radius from 0,50 mm to 1,00 mm, tolerance +/- 0,01 mm in stock
- Tipped with 2 cutting edges (on request also with chip breakers)
- Cutting edge length 3,00 mm

MICRO-EST


MICRO-RST

You can get the following materials for our grooving systems:



Grooving Holder System ECO-Line

Clamping Holder

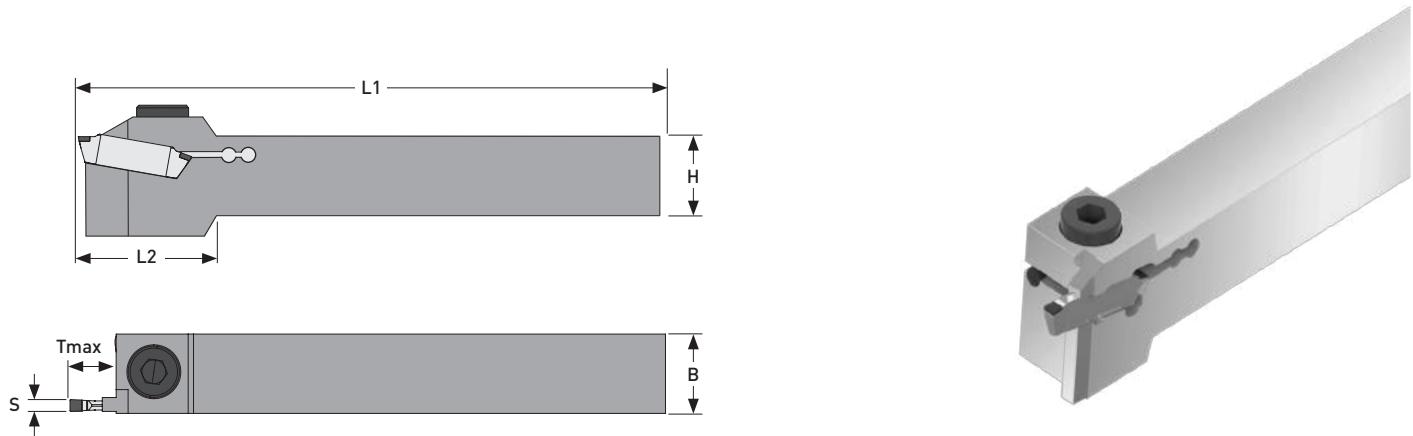

ECO-Line	New	Grooving holder shank 16x16 for Tmax 12 - 25 available in grooving widths 2,00 -6,00					
B	H	S	L1	L2	Tmax	Version	Item No.
16,00	16,00	2,00-3,00	125,00	35,00	12,00	right	ST7060-1210
16,00	16,00	2,00-3,00	125,00	35,00	12,00	left	ST7060-1211
20,00	20,00	2,00-3,00	150,00	35,00	12,00	right	ST7060-1220
20,00	20,00	2,00-3,00	150,00	35,00	12,00	left	ST7060-1221
25,00	25,00	2,00-3,00	150,00	-	12,00	right	ST7060-1230
25,00	25,00	2,00-3,00	150,00	-	12,00	left	ST7060-1231
20,00	20,00	4,00-5,00	150,00	35,00	12,00	right	ST7060-1420
20,00	20,00	4,00-5,00	150,00	35,00	12,00	left	ST7060-1421
25,00	25,00	4,00-5,00	150,00	-	12,00	right	ST7060-1430
25,00	25,00	4,00-5,00	150,00	-	12,00	left	ST7060-1431
20,00	20,00	6,00	150,00	35,00	12,00	right	ST7060-1620
20,00	20,00	6,00	150,00	35,00	12,00	left	ST7060-1621
25,00	25,00	6,00	150,00	-	12,00	right	ST7060-1630
25,00	25,00	6,00	150,00	-	12,00	left	ST7060-1631
20,00	20,00	2,00-3,00	150,00	45,00	25,00	right	ST7060-3220
20,00	20,00	2,00-3,00	150,00	45,00	25,00	left	ST7060-3221
25,00	25,00	2,00-3,00	150,00	-	25,00	right	ST7060-3230
25,00	25,00	2,00-3,00	150,00	-	25,00	left	ST7060-3231
20,00	20,00	4,00-5,00	150,00	45,00	25,00	right	ST7060-3420
20,00	20,00	4,00-5,00	150,00	45,00	25,00	left	ST7060-3421
25,00	25,00	4,00-5,00	150,00	-	25,00	right	ST7060-3430
25,00	25,00	4,00-5,00	150,00	-	25,00	left	ST7060-3431
20,00	20,00	6,00	150,00	45,00	25,00	right	ST7060-3620
20,00	20,00	6,00	150,00	45,00	25,00	left	ST7060-3621
25,00	25,00	6,00	150,00	-	25,00	right	ST7060-3630
25,00	25,00	6,00	150,00	-	25,00	left	ST7060-3631

Clamping Screw 01-SP9090-0801

Clamping Key 01-SP9095-0160

Application range:

- **PCD** Aluminum < 10% Si, Brass, Graphite coarse-grained, Plastics, Zinc ...
- **CVD-D** Aluminum > 10% Si, Carbide > 8% Co, Copper, GFRP/CFRP, Glass materials, Graphite fine-grained, Titanium (Finishing) ...
- **CBN-H** Steel hardened up to 72 HRC ...
- **CBN-X** Tool Steel up to 72 HRC, Stellite, powder metallurgical Steel, Stainless Steel hardened, Ni-, Co-, Fe- and Cr-Alloys ...
- **CBN-K** Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...

Grooving Indexable Insert System ECO-Line


for Grooving, Profile Turning and Parting



DTS GmbH

Germany

ECO-EST

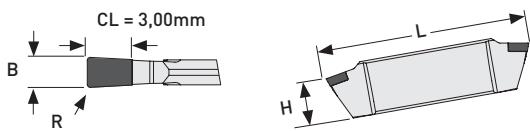


2-cutting edge corner grooving inserts

New	Name	B	R	L	H	PCD	CVD-D	CBN-H	CBN-X	CBN-K
						Item No.				
	EST-B2	2,00	0,20	29,90	7,90	ST1050-0200	ST2050-0200	ST5050-0200	ST5950-0200	ST5550-0200
	EST-B3	3,00	0,20	29,90	7,90	ST1050-0300	ST2050-0300	ST5050-0300	ST5950-0300	ST5550-0300
	EST-B4	4,00	0,20	29,90	7,90	ST1050-0400	ST2050-0400	ST5050-0400	ST5950-0400	ST5550-0400

We are glad to offer you any special geometries on request.

ECO-RST

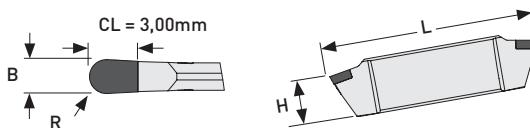


2-cutting edge full radius grooving inserts

New	Name	B	R	L	H	PCD	CVD-D	CBN-H	CBN-X	CBN-K
						Item No.				
	RST-B2	2,00	1,00	29,90	7,90	ST1050-1200	ST2050-1200	ST5050-1200	ST5950-1200	ST5550-1200
	RST-B3	3,00	1,50	29,90	7,90	ST1050-1300	ST2050-1300	ST5050-1300	ST5950-1300	ST5550-1300
	RST-B4	4,00	2,00	29,90	7,90	ST1050-1400	ST2050-1400	ST5050-1400	ST5950-1400	ST5550-1400
	RST-B5	5,00	2,50	29,90	7,90	ST1050-1500	ST2050-1500	ST5050-1500	ST5950-1500	ST5550-1500
	RST-B6	6,00	3,00	29,90	7,90	ST1050-1600	ST2050-1600	ST5050-1600	ST5950-1600	ST5550-1600

We are glad to offer you any special geometries on request.

ECO-AST

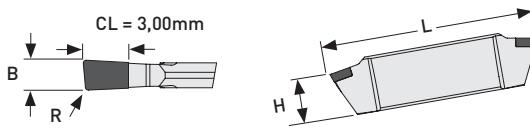


2-cutting edge parting Inserts

New	Name	B	R	L	H	PCD	CVD-D	CBN-H	CBN-X	CBN-K
						Item No.				
	AST-B2R	2,00	0,20	29,90	7,90	ST1050-0290	ST2050-0290	ST5050-0290	ST5950-0290	ST5550-0290
	AST-B2L	2,00	0,20	29,90	7,90	ST1050-0291	ST2050-0291	ST5050-0291	ST5950-0291	ST5550-0291

We are glad to offer you any special geometries on request.

Grooving Holder System MICRO-Line

Clamping Holder

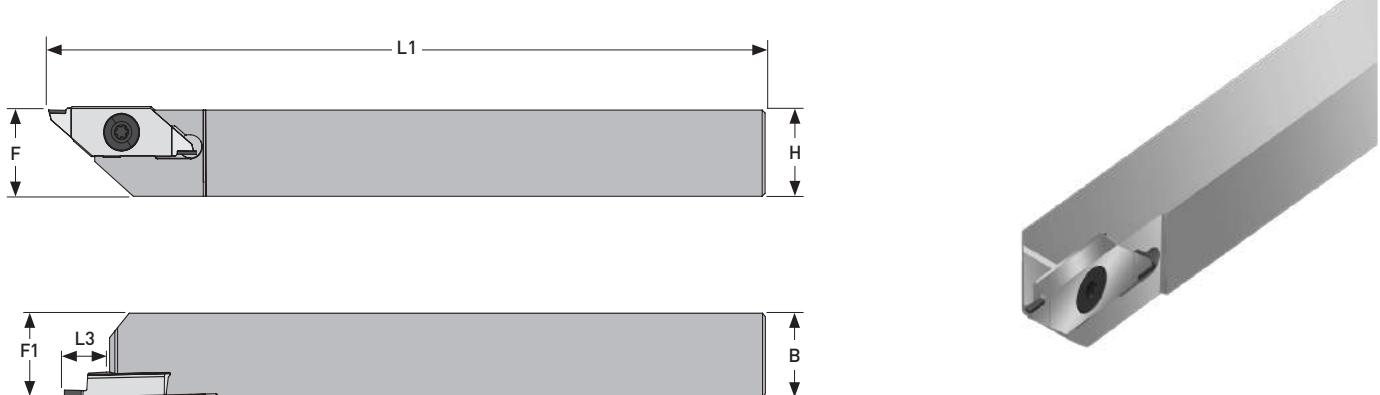

MICRO-Line	New	B	H	L1	L3	F	F1	Version	Item No.
8,00		8,00	8,00	125,00	8,00	10,00	10,00	right	ST7060-0010
8,00		8,00	8,00	125,00	8,00	10,00	10,00	left	ST7060-0015
10,00		10,00	10,00	125,00	8,00	10,00	10,00	right	ST7060-0020
10,00		10,00	10,00	125,00	8,00	10,00	10,00	left	ST7060-0025
12,00		12,00	12,00	125,00	8,00	12,00	12,00	right	ST7060-0030
12,00		12,00	12,00	125,00	8,00	12,00	12,00	left	ST7060-0035
16,00		16,00	16,00	125,00	8,00	16,00	16,00	right	ST7060-0040
16,00		16,00	16,00	125,00	8,00	16,00	16,00	left	ST7060-0045
20,00		20,00	20,00	125,00	8,00	20,00	20,00	right	ST7060-0050
20,00		20,00	20,00	125,00	8,00	20,00	20,00	left	ST7060-0055
								Clamping Screw	01-SP9090-0410
								Clamping Key	01-SP9091-0110

Application range:

- PCD Aluminum < 10% Si, Brass, Graphite coarse-grained, Plastics, Zinc ...
- CVD-D Aluminum <10% Si, Brass, Brass lead-free, Composites (CFRP, GFRP, MMC), Graphite ...
- Ultra-Dia Acrylic, Carbide < 10% Binder, Ceramics, Zircon, ...
- CBN-H Steel hardened up to 72 HRC
- CBN-X Tool Steel up to 72 HRC, Tool Steel low alloyed, Stellite, powder metallurgical Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...

Grooving Indexable Insert System MICRO-Line


for Grooving and Profile Turning



DTS GmbH

Germany

MICRO-EST

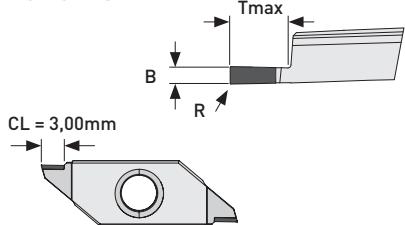


2-edge grooving and profile turning inserts
Figure shows right version

New Name	Version	B	R	Tmax	PCD	CVD-D	Ultra-Dia	CBN-H	CBN-X	CBN-K
					Item No.					
EST-B1	right	1,00	0,05	2,70	ST1050-2100	ST2050-2100	ST1950-2100	ST5050-2100	ST5950-2100	ST5550-2100
EST-B1	left	1,00	0,05	2,70	ST1050-2101	ST2050-2101	ST1950-2101	ST5050-2101	ST5950-2101	ST5550-2101
EST-B1	right	1,00	0,10	2,70	ST1050-2102	ST2050-2102	ST1950-2102	ST5050-2102	ST5950-2102	ST5550-2102
EST-B1	left	1,00	0,10	2,70	ST1050-2103	ST2050-2103	ST1950-2103	ST5050-2103	ST5950-2103	ST5550-2103
EST-B1,5	right	1,50	0,05	3,80	ST1050-2150	ST2050-2150	ST1950-2150	ST5050-2150	ST1950-2150	ST5550-2150
EST-B1,5	left	1,50	0,05	3,80	ST1050-2151	ST2050-2151	ST1950-2151	ST5050-2151	ST1950-2151	ST5550-2151
EST-B1,5	right	1,50	0,10	3,80	ST1050-2152	ST2050-2152	ST1950-2152	ST5050-2152	ST1950-2152	ST5550-2152
EST-B1,5	left	1,50	0,10	3,80	ST1050-2153	ST2050-2153	ST1950-2153	ST5050-2153	ST1950-2153	ST5550-2153
EST-B2	right	2,00	0,05	3,80	ST1050-2200	ST2050-2200	ST1950-2200	ST5050-2200	ST5950-2200	ST5550-2200
EST-B2	left	2,00	0,05	3,80	ST1050-2201	ST2050-2201	ST1950-2201	ST5050-2201	ST5950-2201	ST5550-2201
EST-B2	right	2,00	0,10	3,80	ST1050-2202	ST2050-2202	ST1950-2202	ST5050-2202	ST5950-2202	ST5550-2202
EST-B2	left	2,00	0,10	3,80	ST1050-2203	ST2050-2203	ST1950-2203	ST5050-2203	ST5950-2203	ST5550-2203
EST-B2	right	2,00	0,20	3,80	ST1050-2204	ST2050-2204	ST1950-2204	ST5050-2204	ST5950-2204	ST5550-2204
EST-B2	left	2,00	0,20	3,80	ST1050-2205	ST2050-2205	ST1950-2205	ST5050-2205	ST5950-2205	ST5550-2205

We are glad to offer you any special geometries on request.

MICRO-RST

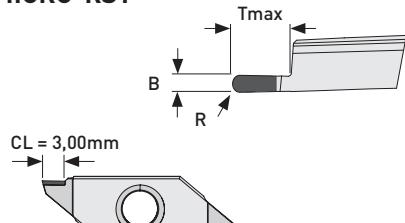

2-edge grooving and profile turning inserts
Figure shows right version

New Name	Version	B	R	Tmax	PCD	CVD-D	Ultra-Dia	CBN-H	CBN-X	CBN-K
					Item No.					
RST-B1	right	1,00	0,50	2,70	ST1050-3100	ST2050-3100	ST1950-3100	ST5050-3100	ST5950-3100	ST5550-3100
RST-B1	left	1,00	0,50	2,70	ST1050-3101	ST2050-3101	ST1950-3101	ST5050-3101	ST5950-3101	ST5550-3101
RST-B1,5	right	1,50	0,75	3,80	ST1050-3150	ST2050-3150	ST1950-3150	ST5050-3150	ST5950-3150	ST5550-3150
RST-B1,5	left	1,50	0,75	3,80	ST1050-3151	ST2050-3151	ST1950-3151	ST5050-3151	ST5950-3151	ST5550-3151
RST-B2	right	2,00	1,00	3,80	ST1050-3200	ST2050-3200	ST1950-3200	ST5050-3200	ST5950-3200	ST5550-3200
RST-B2	left	2,00	1,00	3,80	ST1050-3201	ST2050-3201	ST1950-3201	ST5050-3201	ST5950-3201	ST5550-3201

We are glad to offer you any special geometries on request.

Cutting Parameters

for our Diamond Grooving Inserts – ECO-Line



You can use all our grooving inserts in continuous and interrupted cut.

System ECO-Line Cutting Parameters Diamond

Material	PCD				CVD-D				UltraDiamond				
	V_c [m/min]	F [mm/rev]											
Acrylic (PMMA)	min.	100	0,005	100	0,005	100	0,005	100	0,005	100	0,005		
	max.	3.000	0,25	2.000	0,10	3.000	0,20	2.000	0,15				
Aluminum <12%Si	min.	100	0,01	100	0,01								
	max.	5.000	0,50	2.000	0,30								
Aluminum >10%Si	min.					100	0,01	100	0,01				
	max.					3.000	0,30	1.500	0,25				
Aluminum >20%Si	min.					100	0,01	80	0,01				
	max.					1.500	0,25	800	0,15				
Brass	min.	100	0,01	100	0,01	100	0,008	100	0,008				
	max.	3.000	0,25	1.500	0,15	5.000	0,20	2.500	0,08				
Carbide G-Grade, >11%Co	min.												
	max.												
Carbide G-Grade, <11%Co	min.												
	max.												
Carbide K-Grade, >15%Co	min.												
	max.												
Carbide K-Grade, <15%Co	min.												on request
	max.												
Carbide with Ni Binder	min.												
	max.												
Carbide, Green	min.												
	max.												
Ceramics	min.												
	max.												
Ceramics, Green	min.												on request
	max.												
Composites such as GFRP / CFRP	min.					100	0,01	80	0,008				
	max.					500	0,2	250	0,12				
Copper/Copper Alloys	min.					100	0,01	100	0,01				
	max.					2.000	0,25	1.000	0,15				
Glas, Glass Ceramic	min.												on request
	max.												
Graphite, coarse-grained	min.	100	0,01	100	0,01								
	max.	4.000	0,50	2.000	0,25								
Graphite, fine-grained	min.					100	0,01	100	0,01				
	max.					5.000	1,00	3.000	0,30				
Gold, Silver, Platinum	min.					50	0,005	30	0,004				
	max.					1.500	0,30	800	0,20				
Magnesium	min.	100	0,01	100	0,01	100	0,008	100	0,008				
	max.	2.000	0,25	1.000	0,15	3.000	0,25	2.000	0,15				
MMC Composites	min.					100	0,02	80	0,01				
	max.					600	0,25	300	0,15				
PEEK	min.	100	0,01	80	0,01								
	max.	300	0,50	220	0,40								
Plastics	min.					100	0,01	100	0,01				
	max.					2.000	0,40	1.500	0,30				
Zircon	min.					50	0,008	30	0,004				
	max.					160	0,05	100	0,02				

Cutting Parameters

for our CBN Grooving Inserts – ECO-Line



DTS GmbH

Germany



You can use all our grooving inserts in continuous and interrupted cut.

Material		System ECO-Line Cutting Parameters CBN									
		CBN-H				CBN-X				CBN-K	
Steel hardened up to 55 HRC	min.	100	0,01	80	0,01						
	max.	220	0,08	160	0,06						
Steel hardened up to 62HRC	min.	80	0,01	60	0,01						
	max.	200	0,08	140	0,06						
Steel hardened up to 72 HRC	min.	60	0,01	60	0,01						
	max.	160	0,06	120	0,04						
Tool Steel hardened up to 72 HRC	min.					80	0,01	40	0,008		
	max.					180	0,05	120	0,04		
Powder metallurgical Steel up to 72 HRC	min.					60	0,01	40	0,008		
	max.					160	0,05	140	0,04		
Carbide-Steel Composite > 20% Co*	min.					on request					
	max.										
Ductile Cast Iron (DCI)	min.									100	0,01
	max.									800	0,10
Grey Cast Iron (GCI)	min.									200	0,01
	max.									2.000	0,20
Hard/Soft Machining	min.	80	0,01	60	0,01						
	max.	280	0,08	140	0,05						
Ni-, Co-, Fe- and Cr-Alloys	min.					80	0,01	60	0,01		
	max.					360	0,06	180	0,05		
Sintered Steel	min.									100	0,01
	max.									300	0,10
Sintered Steel hardened	min.	100	0,008	80	0,008						
	max.	250	0,06	160	0,04						
Stellite (Co-Chrom-Alloys)	min.					80	0,01	60	0,01		
	max.					180	0,08	140	0,05		
Stainless Steel hardened	min.					80	0,01	60	0,01		
	max.					250	0,06	140	0,04		
Titanium Alloys	min.					80	0,008	60	0,008		
	max.					200	0,06	160	0,035		

*for machining carbides we recommend the use of CVD-D cutting edges

Cutting Parameters

for our Diamond Grooving Inserts – MICRO-Line



You can use all our grooving inserts in continuous and interrupted cut.

System MICRO-Line Cutting Parameters Diamond

Material	PCD				CVD-D				UltraDiamond				
	V_c [m/min]	F [mm/rev]											
Acrylic (PMMA)	min.	100	0,005	100	0,005	100	0,005	100	0,005	100	0,005	100	0,005
	max.	3.000	0,25	2.000	0,10	3.000	0,20	2.000	0,15	3.000	0,20	2.000	0,15
Alumnium <12%Si	min.	100	0,005	100	0,005								
	max.	5.000	0,30	2.000	0,15								
Aluminum >10%Si	min.					100	0,005	100	0,005				
	max.					3.000	0,25	1.500	0,15				
Aluminum >20%Si	min.					100	0,005	80	0,005				
	max.					1.500	0,18	800	0,12				
Brass	min.	100	0,008	100	0,005	100	0,005	100	0,005				
	max.	3.000	0,15	1.500	0,15	5.000	0,12	2.500	0,10				
Carbide G-Grade, >11%Co	min.												
	max.												
Carbide G-Grade, <11%Co	min.												
	max.												
Carbide K-Grade, >15%Co	min.												
	max.												
Carbide K-Grade, <15%Co	min.												
	max.												
Carbide with Ni Binder	min.												
	max.												
Carbide, Green	min.												
	max.												
Ceramics	min.												
	max.												
Ceramics, Green	min.												
	max.												
Composites such as GFRP / CFRP	min.					100	0,01	80	0,008				
	max.					800	0,15	500	0,10				
Copper / Copper Alloys	min.					100	0,01	100	0,01				
	max.					2.000	0,25	1.000	0,15				
Glass Ceramic	min.									50	0,005	30	0,003
	max.									160	0,015	100	0,01
Graphite, coarse-grained	min.	100	0,01	100	0,008								
	max.	4.000	0,15	2.000	0,10								
Graphite, fine-grained	min.					100	0,01	100	0,008				
	max.					5.000	0,22	3.000	0,12				
Gold, Silver, Platinum	min.					50	0,005	30	0,004	50	0,005	30	0,004
	max.					1.500	0,20	800	0,15	1.500	0,20	800	0,15
Magnesium	min.	100	0,008	100	0,005	100	0,008	100	0,008				
	max.	2.000	0,15	1.000	0,10	3.000	0,12	2.000	0,10				
MMC Composites	min.					100	0,01	80	0,008				
	max.					600	0,15	300	0,10				
PEEK	min.	100	0,01	80	0,01								
	max.	300	0,50	220	0,40								
Plastics	min.					100	0,01	100	0,01				
	max.					2.000	0,30	1.500	0,20				
Zircon	min.					50	0,008	30	0,004				
	max.					160	0,05	100	0,02				

Cutting Parameters

for our CBN Grooving Inserts – MICRO-Line Stechplatten



DTS GmbH

Germany



You can use all our grooving inserts in continuous and interrupted cut.

System MICRO-Line Cutting Parameters CBN

Material		CBN-H				CBN-X				CBN-K			
		V_c [m/min]	F [mm/rev]										
Steel hardened up to 55 HRC	min.	100	0,007	80	0,007								
	max.	220	0,060	160	0,040								
Steel hardened up to 62HRC	min.	80	0,007	60	0,007								
	max.	200	0,060	140	0,040								
Steel hardened up to 72 HRC	min.	60	0,007	60	0,007								
	max.	180	0,040	120	0,030								
Tool Steel hardened up to 72 HRC	min.					80	0,007	40	0,006				
	max.					180	0,035	120	0,028				
Powder metallurgical Steel up to 72 HRC	min.					60	0,007	40	0,006				
	max.					160	0,040	140	0,030				
Carbide-Steel Composite > 20% Co*	min.					on request							
	max.												
Ductile Cast Iron (DCI)	min.									100	0,007	80	0,007
	max.									800	0,070	240	0,040
Grey Cast Iron (GCI)	min.									200	0,007	100	0,007
	max.									2.000	0,140	600	0,040
Hard/Soft Machining	min.	80	0,007	60	0,007								
	max.	280	0,060	140	0,035								
Ni-, Co-, Fe- and Cr-Alloys	min.					80	0,007	60	0,007				
	max.					360	0,040	180	0,035				
Sintered Steel	min.									100	0,007	80	0,060
	max.									300	0,07	160	0,040
Sintered Steel hardened	min.	100	0,006	80	0,006								
	max.	250	0,040	160	0,030								
Stellite (Co-Chrom-Alloys)	min.					80	0,007	60	0,007				
	max.					180	0,060	140	0,040				
Stainless Steel hardened	min.					80	0,007	60	0,007				
	max.					250	0,040	140	0,030				
Titanium Alloys	min.					80	0,006	60	0,006				
	max.					200	0,040	160	0,025				

*for machining carbides we recommend the use of CVD-D cutting edges

Cooling According to Cutting Situation

when using DTS Grooving Tools

		Dry	Air	Emulsion	Oil
H		4. Choice	3. Choice	1. Choice	2. Choice
		1. Choice	2. Choice		
		1. Choice	2. Choice		
X		4. Choice	3. Choice	1. Choice	2. Choice
		2. Choice	1. Choice		
		2. Choice	1. Choice		
K		3. Choice	2. Choice	1. Choice	
		2. Choice	1. Choice		
		1. Choice	2. Choice		
PCD			3. Choice	1. Choice	2. Choice
			3. Choice	1. Choice	2. Choice
CVD-D			3. Choice	1. Choice	2. Choice
			3. Choice	1. Choice	2. Choice
Ultra Diamond			3. Choice	1. Choice	2. Choice
			3. Choice	1. Choice	2. Choice
continuous cut light interrupted cut heavy interrupted cut					


Formulas

Grooving



DTS GmbH

Germany

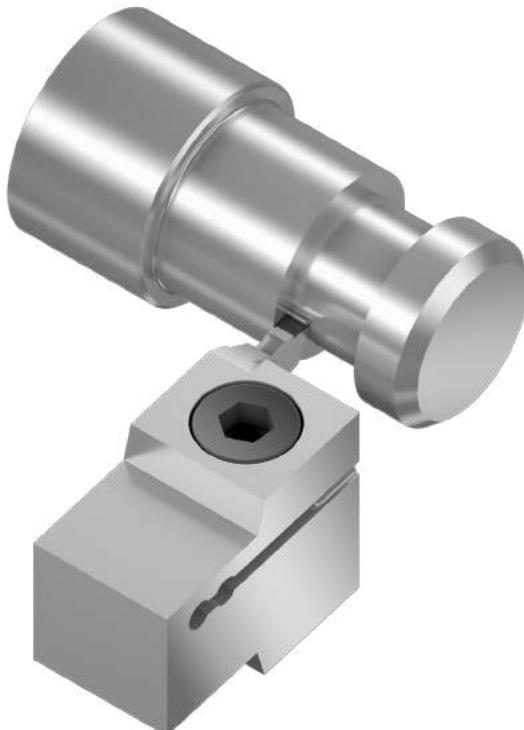

v_f	Feed rate	mm/min
f_n	Feed per revolution	mm/rev
n	Spindle speed	rev/min
v_c	Cutting speed	m/min
D_c	Cutter diameter	mm
t_c	Cutting Time	min
l_m	Cutting length	mm
Q	Stock removal rate	cm³/min
a_p	Cutting depth	mm

► Cutting speed

$$V_c = \frac{D_c \times \pi \times n}{1000} \quad [\text{m/min}]$$

► Spindle speed

$$n = \frac{v_c \times 1000}{\pi \times D_c} \quad [\text{rev/min}]$$

► Feed per revolution

$$f_n = \frac{v_f}{n} \quad [\text{mm/rev}]$$


► Cutting time

$$t_c = \frac{l_m}{f_n \times n} \quad [\text{min}]$$

► Stock removal rate

$$Q = v_c \times a_p \times f_n \quad [\text{cm}^3/\text{min}]$$

Your Notes

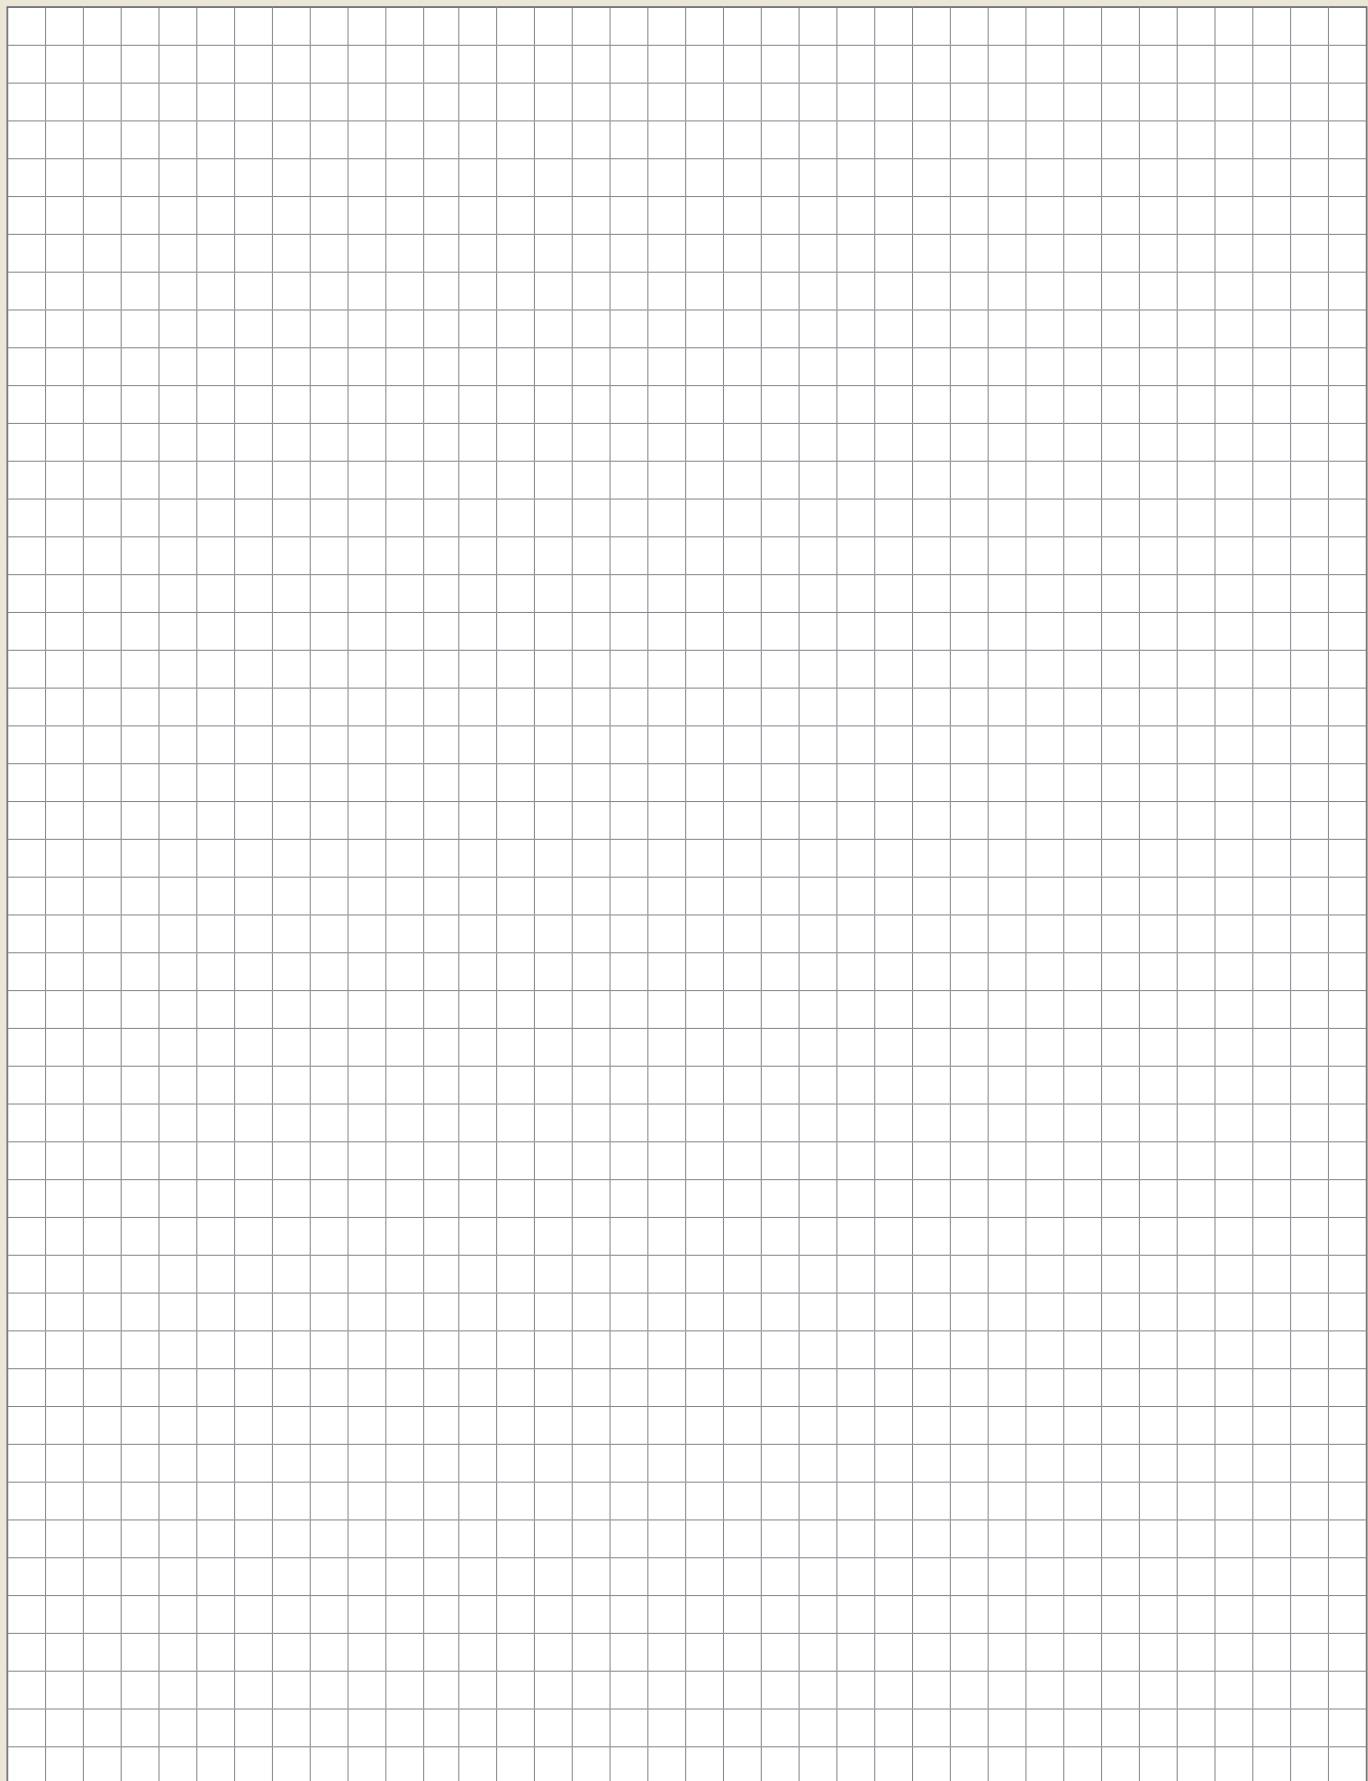


Your Notes



DTS GmbH
Germany

Your Notes

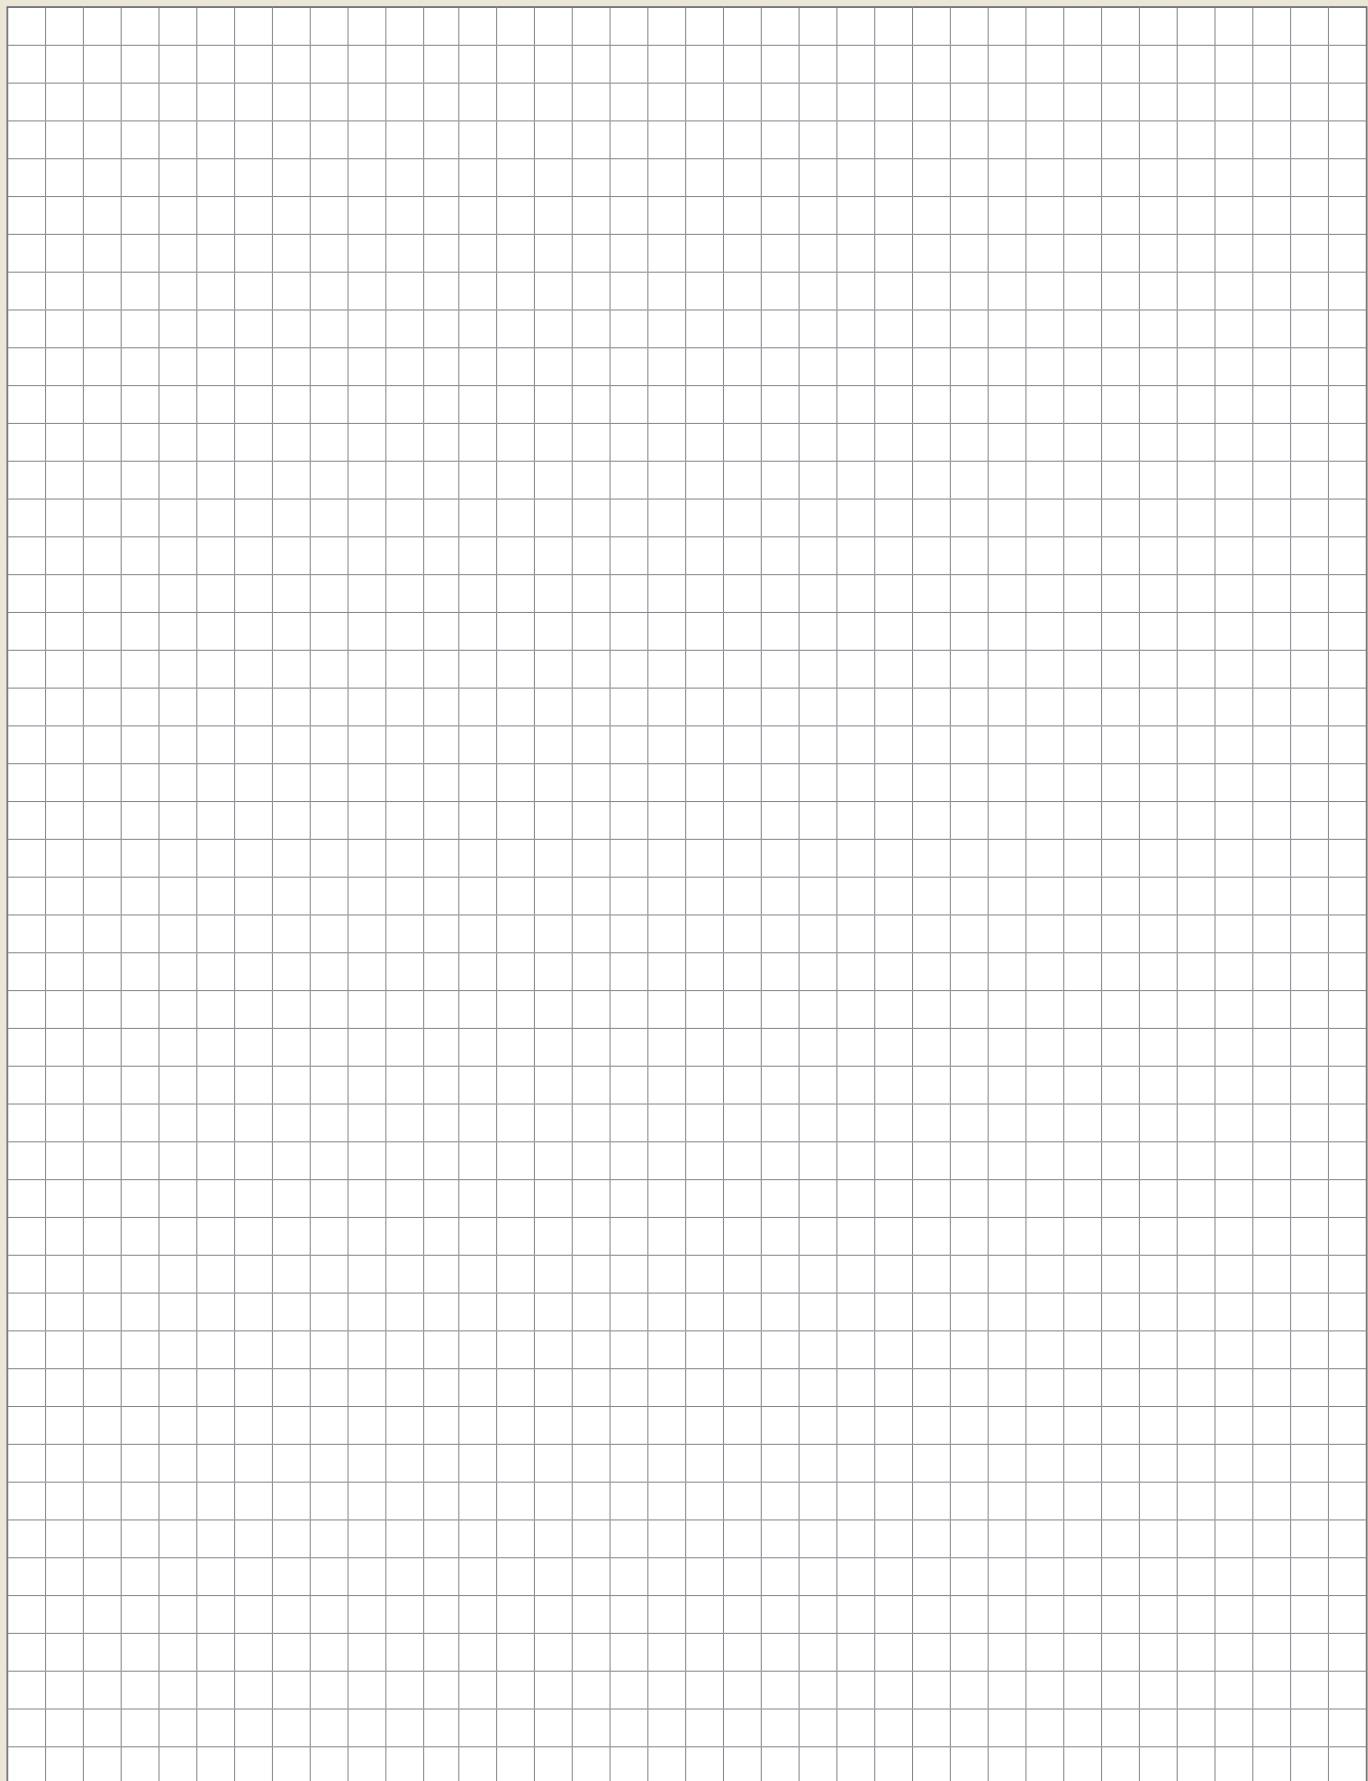



Copyright:


The reprint of our catalogs, copies of our flyers and newsletters or only excerpts such as illustrations, designs, technical information and design require the written permission of DTS GmbH. Copies or only excerpts such as illustrations, designs, technical information from our homepage and our online store are only permitted with the written consent of DTS GmbH.

All rights are reserved. Errors, misprints or printing errors do not entitle to claims. The pictorial and graphic representation of our tools do not necessarily have to correspond to the actual tool in all details.

We reserve the right to make production-related technical changes and changes to the delivery program. The cutting values given are guide values which must be adjusted according to the process environment.

Safety Instructions:

- ▶ DTS tools equipped with ultra-hard cutting edges are very sharp laser cut tools.
- ▶ Careful handling of the tools during unpacking and their use is recommended.
- ▶ Wearing protective gloves reduces the risk of injury.
- ▶ Material chipping and tool breakage may occur during machining, wearing safety glasses is recommended.
- ▶ Balanced holders are recommended for speeds above 10,000 rpm.
- ▶ We do not accept any responsibility for tools that have been modified, reground or used incorrectly and beyond their normal service life.
- ▶ Protective goggles are recommended when using DTS tools, sparks may also occur, make sure that no fire can occur.



PASSION FOR DIAMOND



Hans-Geiger Straße 11a · D-67661 Kaiserslautern

+49 (0) 6301 32011-0
+49 (0) 6301 32011-90

info@diamond-toolingsystems.com

Homepage: www.diamond-toolingsystems.com

Shop: www.diamond-tools24.com